



S Series									
Lengths	4'	6'	8'	10'	12'	14'	16'	18'	20'
Widths	12"	18"	24"	30"					




Features:

- Two FDA approved belt options – polyurethane solid surface or polypropylene link style – easy changeout
- 3" Tight transfer
- AC motor – ½ HP and epoxy coated
- VFD options
- Stainless steel adjustable height legs 32"-42" top of belt
- Toolless disassembly

Options:

- Belt type
- VFD disconnect switch and E-Stop
- I/O
- Hopper
- Scraper blade
- Casters
- Discharge chute

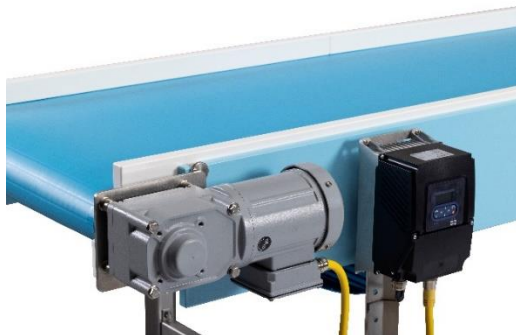

W: dynamicconveyor.com
E: sales@dynamicconveyor.com
P: 231-798-1483